





Secure online payment Accettiamo i più comuni metodi di pagamen





SOFT PUTTY 2 KG

Universal flexible white putty, ideal for application on steel, zinc-plated sheet, alluminium and fiberglass surfaces. Recommended for significant filling but also for thin applications. Excellent adhesion.



LIGHT PUTTY 1,1 L

1101

Polyester flexible putty with a low specific weight. Very low permeability to humidity, exceptional resistance to atmosferic agents and strong adhesion. Exceptional sanding, elasticity and impact resistance. It is particulary suitable every time the lightness is an important topic.





EXTRASOFT PUTTY 750 ML

Universal putty with a medium specific weight to treat every kind of surface. Very easy application by knife and excellent compactness. Its specific formulation allows a particularly easy sanding, a very low permeability to humidity, a strong adhesion and an excellent finishing. It is particularly suitable every time the lightness is an important topic.



1301

ALUMINUM PUTTY 2 KG

Two-component filler containing high percentage of aluminium powder, which allows to obtain adhesion, hardness, resistance to water, fuels and lubricants. It has good anti-corrosive properties. It is mainly utilized to recover flaws of fusion, to restore and protect metal sheets and for filling imperfectons on zinc-plated materials.





METAL PUTTY 1,5 KG

Two-component filler containing high percentage of flaked metal aluminium, which allows to obtain adhesion, hardness, resistance to heat, to water, fuels and lubricants. It has exceptional anti-corrosive properties. It is mainly utilized to recover flaws of fusion, as filling material, since it can be pierced and trimmed, to restore and protect metal sheets and for filling imperfections on zinc-plated materials.



15500

PUTTY FOR PLASTIC 500 ML

Versatile and flexible filler, especially developed for plastic materials. Its special formulation grants high adhesion properties and easiness in sanding. Due to the low specific weight, the overall weight of therepaired part is unaltered.



VETRORESINA PUTTY 1,5 KG

1601

Special filler reinforced with fiberglass. Easy sanding. Used to repair holes and other big imperfections of sheet metal and glass fiber panels.




G-10440

K-GLAZE 440 ML

K- GLAZE is a premium finishing putty designed to eliminate pinholes and cover surface imperfections. Its advanced formulation gives a smooth self-leveling finish with minimal sanding.

K-GLAZE is tack free and has excellent adhesion properties. Typical use: Designed for use as a finishing coat over body filler or small spot filling prior to overpainting.

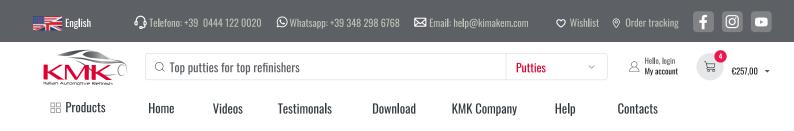



LIGHTWEIGHT PREMIUM BODYFILLER 1 L

Premium Lightweight Body Filler especially developed for light filling and finishing. Its smooth self-leveling formula facilitates an excellent spreading, reducing sanding time and eliminating the need for finishing glaze.

Formulated for faster working, clog free, tack free and pinhole free. Its superior sanding properties make the product ideal to reduce labour costs. 1 liter size.



LIGHTWEIGHT PREMIUM BODYFILLER 3 L

Premium Lightweight Body Filler especially developed for light filling and finishing. Its smooth self-leveling formula facilitates an excellent spreading, reducing sanding time and eliminating the need for finishing glaze.

Formulated for faster working, clog free, tack free and pinhole free. Its superior sanding properties make the product ideal to reduce labour costs. 3 liters size.





LIGHTWEIGHT SUPERIOR BODYFILLER 1 L

Universal light bodyfiller with high filling capacity. Due to its sanding ease it can be started with P120. Lightweight polyester bodyfiller. Formulated for fast work, dries rapidly and is easy to sand. Its creamy texture and good spreading allows easy repair of large areas. 1 liter size.





1903

1803

LIGHTWEIGHT SUPERIOR BODYFILLER 3 L

Universal light bodyfiller with high filling capacity. Due to its sanding ease it can be started with P120. Lightweight polyester bodyfiller. Formulated for fast work, dries rapidly and is easy to sand. Its creamy texture and good spreading allows easy repair of large areas. 3 liters size.

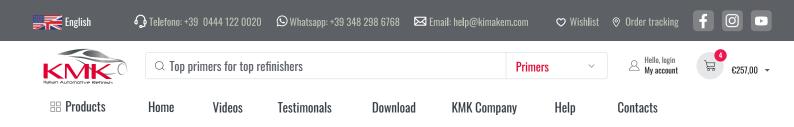



1K PRIMER SURFACER 3 L

Nitro-synthetic basecoat of general use with high filling properties and fast drying. It can be topcoated with nitrocellulose, synthetic and acrylic finish. Excellent adhesion and strong covering power. It can be applied in thick coats. It is non-absorbing and leaves a very smooth surface. Once sanded or filed, it looks like metal.



3504

HS 2K 4:1 PRIMER 4 L

High solid two component primer at low content of solvent, very suitable for new jobs and repairs. It hardens very rapidly, sands very easily and non-absorbing. Overpainted with any type of finish.

Available colours: light grey (\bullet 3504), dark grey (\bullet 3504/S), white (\odot 3504/B) and black (\bullet 3504/N)

Hardener: 4001 (ultrafast), 4101 (fast), 4201 (normal)



HS 2K 5:1 ULTRA RAPID PRIMER 3,8 L

Ultra fast high solid two component acrylic primer at low content of solvent, very suitable for car- repairing. Sandability just after one hours from application. Overpainted with any type of finish. Available colours:

light grey (•36038), dark grey (•36038/S), white (•36038/B) and black (•36038/N)


Hardener: 4001 (ultrafast), 4101 (fast), 4201 (normal)




31750

1K PLASTIC PRIMER 750 ML

One-component product for all plastic parts of cars. It can be used on every type of paints and on every product used for repairs of plastic materials. Once sanded or filed, it looks like metal.

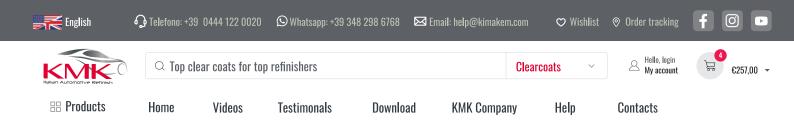



2K 3:1 MATT CLEAR COAT 1 L

2K High Solid Matt Clear Coat for car refinishing and industrial applications, can be used as a clear coat in circumstances where applications require matt finish. When satin finishes are required, it can be mixed with the various 2K clear coats to provide different levels of finish. Especially recommended for partial paint jobs, guarantees high quality and hardwearing finishes.

Hardener: 48300



4:1 EXPRESS CLEARCOAT 3.78 L

Very fast curing, high gloss 2K acrylic clear coat. It is ideal for spot repairs as well as for panel applications and very easy to apply due to its very low viscosity even at low pressures, avoiding an excess of overspray. Once applied, the dust free and ambient drying times are very fast.

Hardener: 4901

2304



2205

2K 2:1 CLEARCOAT 5 L

Acrylic 2K Polyurethane varnish. High gloss levels and easy application. Can be used in both partial and complete repairs. It's hardness allows that when necessary the polishing process can be done easily and quickly.

Hardener: 4725N (normal), 4725F (fast)




4:1 CLEARCOAT 3.78 L

It is ideal for partial or complete repairs. Due to its viscosity and solvent selection, it's easy to apply, even at low pressures. It is easy to avoid excessive spraying. Once applied, dust dry and air curing are quick. For its characteristics this product is easy to polish.

Hardener: 4901

2404

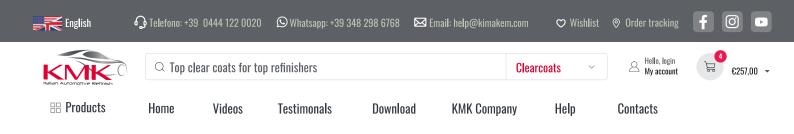



HS 2K 2:1 ANTI-SCRATCH CLEAR COAT 1 L

2K High Solid Clear Coat for excellent gloss and high filling properties. Its solid content allows to obtain very good results with half a coat plus a finishing coat; it's also possible to apply it in just one coat. Exceptional resistance to atmospheric agents, to yellowing and to scratches.

Hardener: 41500 (fast), 42500 (normal)



2505

HS 2K 2:1 ANTI-SCRATCH CLEAR COAT 5 L

2K High Solid Clear Coat for excellent gloss and high filling properties. Its solid content allows to obtain very good results with half a coat plus a finishing coat; it's also possible to apply it in just one coat. Exceptional resistance to atmospheric agents, to yellowing and to scratches.

Hardener: 4025 (ultrafast), 4125 (fast), 4225 (normal), 4325 (slow)





HS 2K 2:1 ANTI-SCRATCH FAST CLEAR 1 L

2K High Solid Clear Coat for excellent gloss and high filling properties. Its solid content allows to obtain very good results with half a coat plus a finishing coat; it's also possible to apply it in just one coat. Exceptional resistance to atmospheric agents, to yellowing and to scratches. 25% faster than 2501.


Hardener: 41500 (fast), 42500 (normal)



2505R

HS 2K 2:1 ANTI-SCRATCH FAST CLEAR L

2K High Solid Clear Coat for excellent gloss and high filling properties. Its solid content allows to obtain very good results with half a coat plus a finishing coat; it's also possible to apply it in just one coat. Exceptional resistance to atmospheric agents, to yellowing and to scratches. 25% time faster than 2505. Hardener: 4025 (ultrafast), 4125 (fast), 4225 (normal), 4325 (slow)

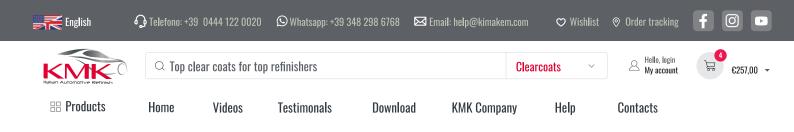



UHS 2K 2:1 TOP CLEAR 1 L

2K ultra high solid acrylic clear coat for car refinishing. Easy application, rapid hardening. It allows a quality finish, where high gloss and resistance are necessary. It is especially suitable for bodyshop repair work using waterbourne base coats.

Hardener: 41500 (fast), 42500 (normal)



2605

UHS 2K 2:1 TOP CLEAR 5 L

2K ultra high solid acrylic clear coat for car refinishing. Easy application, rapid hardening. It allows a quality finish, where high gloss and resistance are necessary. It is especially suitable for bodyshop repair work using waterbourne base coats.

Hardener: 4025 (ultrafast), 4125 (fast), 4225 (normal), 4325 (slow)



2705

UHS 2K 2:1 ULTRA RAPID CLEAR COAT 5 L

Acrylic clear coat ultra high solid, very fast drying. High gloss, beautiful finishes and easy to use, due to a very low viscosity. Excellent adhesion on waterborne and on solventbome base coats.

Hardeners: 4425 (normal), 4525 (fast), 4625 (slow).




2805

UHS 2K 2:1 ANTI-DRIP CLEAR COAT 5 L

New to the field of car-repair clear coats, due to the product's rheorogical properties that notably prevent sagging while ensuring excellent spread. Ease to application, excellent spreading, high gloss and fast drying time. It is especially suitable for bodyshop repair work using waterbourne base coats as it cuts effects caused by the absorption of these latter.

Hardeners: 4425 (normal), 4525 (fast), 4625 (slow).



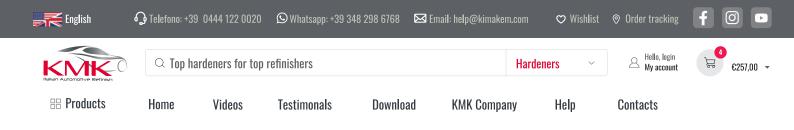










SLOW HARDENER 2.5 L






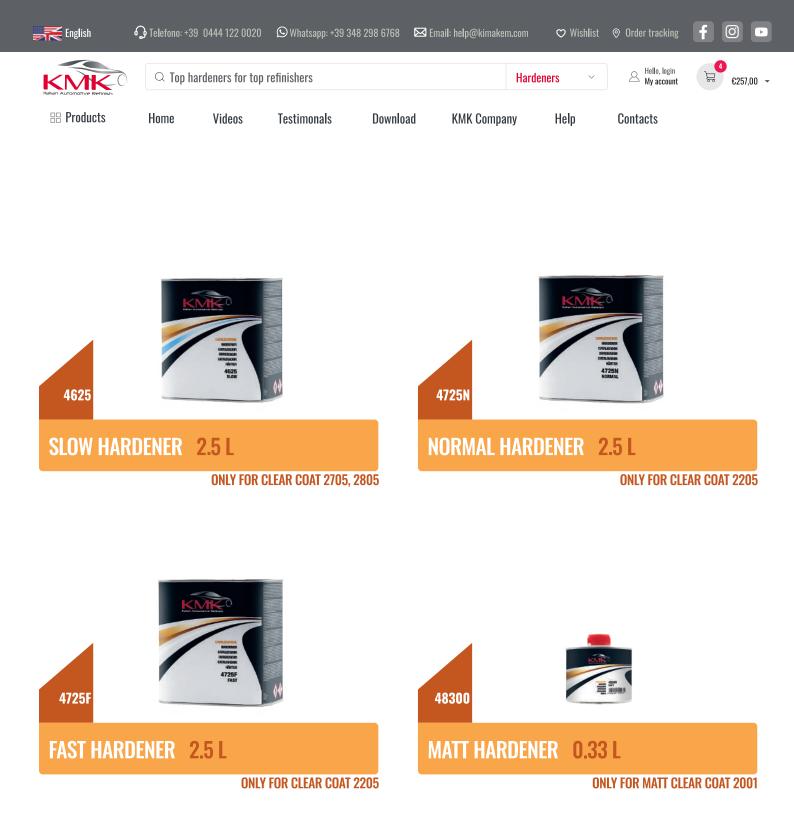









81xx

1K BASECOAT 3,78 L

Double layer paint, composed of polyester resins 1K. It has a satin finish and it is fast-drying. Excellent coverage and easy to apply. It always needs a clearcoat, preferably 2K.

Available colours: super white (\bigcirc 8110), jet black (\bullet 8120), brillant silver met (\bullet 8130).

2K TOPCOAT 3,78 L

82xx

2K high gloss polyurethane-acrylic topcoat. High brightness and durable. Ideal for finishes in commercial vehicles, agricultural machinery and construction projects where the final finish is an important requirement.

K-COLOR

8210

2K TOPCOAT

Available colours: super white (\bigcirc 8210), jet black (\bullet 8220), brillant silver met (\bullet 8230).

Hardener: 4025 (ultrafast), 4125 (fast), 4225 (normal), 4325 (slow)



KIT SKUDO BLACK PROTECTIVE COATING

2K protective coating polyurethane acrylic. Its high mechanical and chemical resistance make it the ideal product to coat the visible parts of trailers, pick ups and other visible surfaces that may be exposed to the most demanding conditions, both physical and environmental.

Kit composed of: protective coating 600 ml + hardener 200 ml



K1H 81600

KIT SKUDO TINTABLE PROTECTIVE COATING

2K protective coating polyurethane acrylic. Its high mechanical and chemical resistance make it the ideal product to coat the visible parts of trailers, pick ups and other visible surfaces that may be exposed to the most demanding conditions, both physical and environmental.

Kit composed of: protective coating 600 ml + hardener 200 ml

